

# PremFire FR Silicone

## Product Description

Neutral silicone for fire spread prevention. Sealant with increased fire resistance for joints exposed to fire. Specially designed for weather sealing of expansion joints where fire resistance is required.

## Features

- Withstands fire up to 4 hours
- Elastic
- Halogen, solvent and asbestos free
- High movement capability
- Excellent adhesion to a wide range of porous and non-porous substrates
- Low odour
- UV radiation, weather and ageing resistant

## Typical Applications

- Weather sealing expansion joints where fire resistance is required
- Sealing fire-proof window and door frames
- Sealing ventilation and smoke ducts, cable passages, pipe penetrations

## Adhering to:

- Concrete
- Masonry
- Brick
- Aluminium (lacquered, anodized, painted)
- PVC
- Glass
- Ceramics
- Most plastics

	Value
Basis	Oxime
Density (DIN 53 479-B)	1.25 g/ml
Tack free time	5-8 min
Skin forming time	10-20 min
Curing rate	2-3mm/24h
Application temperature	+5°C to+40°C
Service temperature	-40°C to+150°C
Movement capability (ISO 11600)	±25%
Shelf life	18 months
Shore A hardness (ISO 868)	22-26
E-Modulus 100% (ISO 37) cured	0.38N/mm <sup>2</sup>

### Premier Sealant Systems Ltd.

T 01724 864 100 | E sales@sealprem.com | [www.sealprem.com](http://www.sealprem.com)

Mercia Way, Foxhills Industrial Park, Scunthorpe, DN15 8RE

Registered in Cardiff No. 3000843

Tensile strength (ISO 37) cured	1.6N/mm <sup>2</sup>
Elongation at break (ISO 37) cured	>600%
Colour	White, grey
Package	300 ml cartridge

## Application Instructions

Application conditions:

Application temperature between +5°C and +40°C.

Surface preparation:

The surfaces must be dry, clean from dust, loose particles and oil. Non-porous surfaces should be cleaned with solvent and a clean, non-fluffy cotton cloth. Solvent excess should be removed before evaporating with a clean cloth.

Application method:

Cartridge: cut off the threaded end of the cartridge and screw on the application nozzle for directing sealant. Cut the threaded end in a way where a suitable opening for application is produced. Place the cartridge together with the applicator in the gun and fill the installation nozzle with sealant, by repeatedly pressing the gun trigger.

Apply sealant in the joint by repeatedly and evenly pressing on gun trigger and smoothly dragging the nozzle along the joint. After application, smooth the surface with a suitable tool (e.g., spatula) and remove excess material.

If necessary, the adjacent surfaces of the joint should be protected to avoid staining. Usually, masking tape is used for this. Protective masking tapes should be removed before the sealant's skin is formed.

In wider and movable joints, backer rod should be used as a back-up material, to ensure the correct thickness and shape of sealant joint and to avoid three-sided adhesion.

Ensure adequate ventilation in all joint locations. During the curing process, make sure that no impurities can settle on the surface and that the joint surface is not affected by mechanical load.

Cleaning:

Uncured sealant can be cleaned with solvents like white spirit, acetone or with special cleaning wipes.

Cured sealant can be removed mechanically. If needed silicone remover should be used.

## Storage conditions and shelf life

Guaranteed shelf life 18 months from the manufacturing date when stored in closed original package in a dry place and protected from direct sunlight at temperatures between +5°C and +30°C.

## Limitations

- Do not use on bituminous substrates or on building materials which might bleed oils, plasticizers or solvents (e.g. natural rubber, chloroprene, EPDM, ...).
- There is no adhesion to PE, PP, PTFE (Teflon®).
- We don't recommend this product to be used for natural stone sealing.
- Due to the wide variety of possible substrates, we recommend a preliminary compatibility and adherence test. If necessary, prime surfaces to improve adhesion.
- Due to the wide variety of influences during and after application, the customer must always test the product first.
- Please observe the expiration date!

## Safety regulations

Ensure sufficient ventilation during application and wear necessary personal protective equipment.

More specific safety information is available on the safety data sheet (SDS).

## Technical classification and certificates

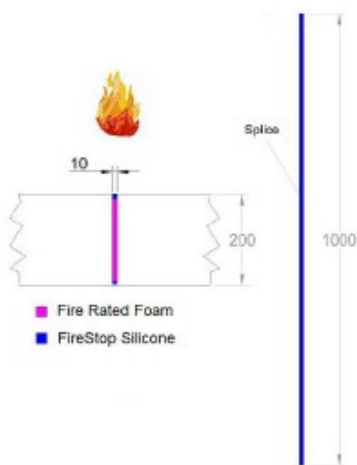
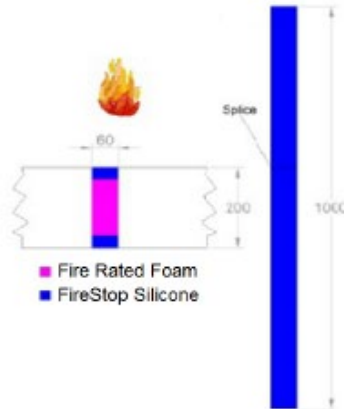
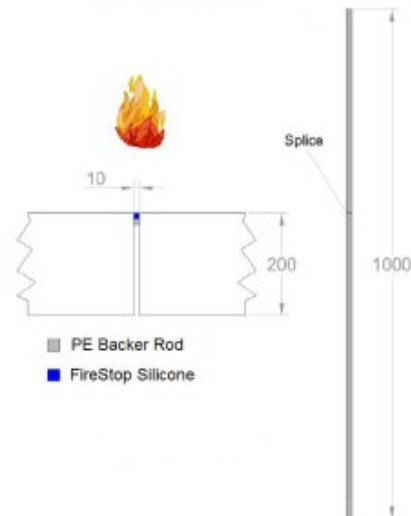
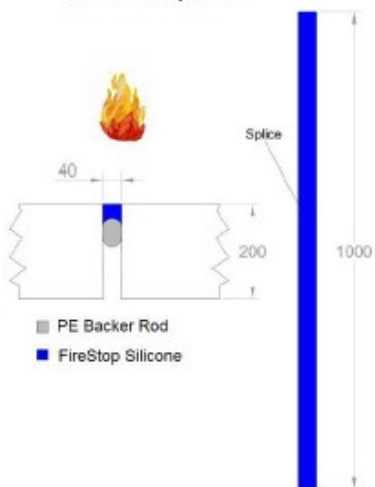
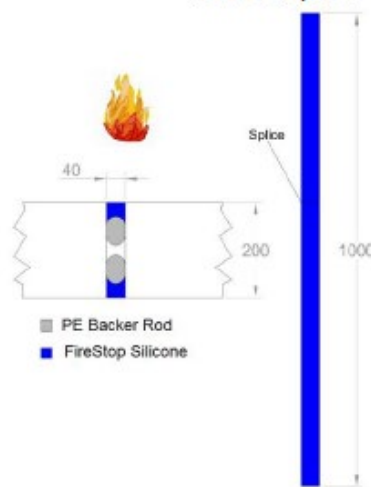
- FIRE RESISTANCE classification according to EN 13501-2.
- Tested according to EN 1366-4 "Fire resistance test for service installations. Linear joint seals". (Equivalent to BS 476, Part 20).
- Tested according to EN 1366-3 "Fire resistance test for service installations. Penetration seals".
- FIRE PERFORMANCE classification: B-s3, d0 according to EN 13501-1.
- Tested according to EN 13823: "Reaction to fire tests for building products" and EN-ISO 11925-2 "Ignitability of building products subjected to direct impingement of flame".
- Sealant for facade for interior and exterior application, suitable for use in cold climate. EN 15651-1:2012: Type F-INT-EXT-CC: CLASS 25HM

## Fire rating

Fire resistance according to EN 1366-4 Linear joints

Selant dimensions		Backing material	Orientation	Rating acc. EN 1366-4		Classification according EN 13501-2	Nº report
Width (mm)	Depth (mm)			Integrity (E) (min.)	Insulation (I)(min.)		
10 <sup>(1)</sup>	10	FR-PU	Vertical	242	242	E 240 EI 240 V-X-F-W 10 to 10	13_02508-1
60 <sup>(2)</sup>	30	FR-PU	Vertical	242	242	E 240 EI 240 V-X-F-W 60 to 60	13_02508-2-3-a
10 <sup>(3)</sup>	10	PE	Vertical	114	88	E 90 EI 60 V-X-F W 10 to 10	13_02508-1
40 <sup>(4)</sup>	10	PE	Vertical	246	164	E 240 EI 120 V-X-F-W 00 to 40	17067-4
40 <sup>(5)</sup>	30	PE	Vertical	242	242	E 240 EI 240 V-X-F-W 40 to 40	13_02508-2-8-a

**Legend:** FR-PU: Fire Rated PU foam / PE: Polyethylene Backer Rod V: Vertical supporting construction – vertical joint; X: No movement; F: Field (joint made following real conditions); W: joint width.

**Test Sample 1**

**Test Sample 2**

**Test Sample 3**

**Test Sample 4**

**Test Sample 5**


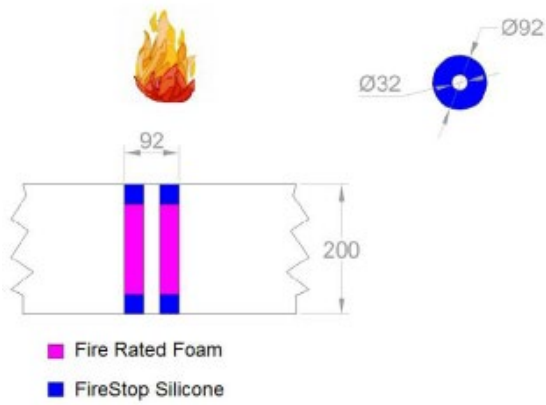
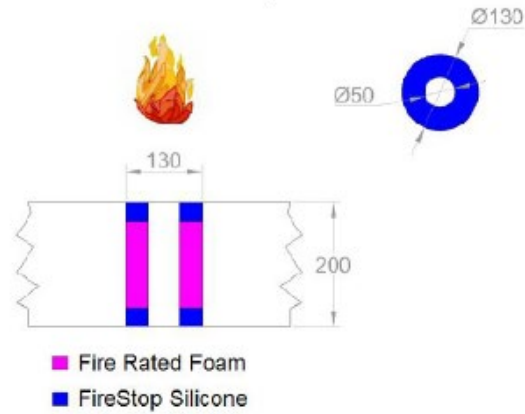
Remark: Fire Rated Foam- FireRated Gunfoam B1

Fire resistance according to EN 1366-3 Penetration sealing system. Type of sealing system "sealant+foam+sealant".

PVC Piping diameter* (mm)	Thickness of sealing system (mm)	Sealant thickness (mm)	Length of foam layer (mm)	Rating acc. EN 1366-3		Classification according EN 13501-2	Nº report
				Integrity (E) (min.)	Insulation (I) (min.)		
32 <sup>(6)</sup>	30	30	140	242	242	EI 240 U/U**	3_02508-2-14-1-a
50 <sup>(7)</sup>	40	30	140	118	101	EI 90 U/U**	13_02508-1

\*Pipe wall thickness 3,0mm

\*\*Pipe end configurations: U: Uncapped (both inside and outside the furnace) /Tests applicable to lower diameter

**Test Sample 6**

**Test Sample 7**


Remark: Fire Rated Foam- FireRated Gunfoam B1

Please note: The above technical information is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. May 2024

**Premier Sealant Systems Ltd.**

T 01724 864 100 | E sales@sealprem.com | [www.sealprem.com](http://www.sealprem.com)

Mercia Way, Foxhills Industrial Park, Scunthorpe, DN15 8RE

Registered in Cardiff No. 3000843