

Fire Retardant Polyethylene


Product Description

Premseal profiled foam fillers are designed to seal roofing & cladding profiles against dust, water and water vapour ingress.

Features

Premseal fillers are supplied:

- Made to measure
- Ventilated
- With extended base
- In spacer & strip form
- Angle-cut

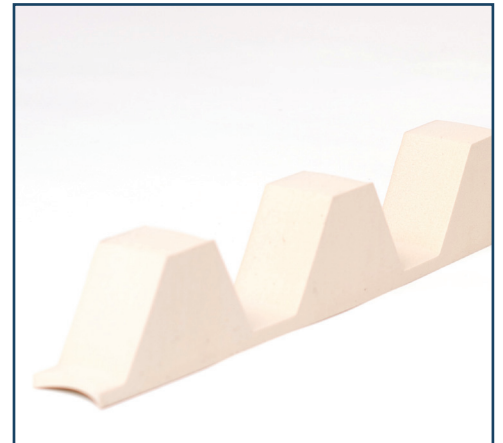

Typical Applications

- Sealing eaves and ridge
- Sealing hips and valleys
- Sealing rooflights

L32FBR	
Type	Standard
Material	Fully closed cell cross-linked PE FR
Colour	Black
Thickness	32mm
Density (kg/m ³)	24
Service temperature (°C)	-70°C to +80°C
Flammability (test reports available on request)	DIN 4102 pt 14-B1 - Pass 6 – 20mm thick UL94 HF1 + HF2 - Pass 3 – 13mm thick
Horizontal burn rate	ISO 7214 1998 - 5 – 13mm thick Extinguishes and melts from flame
Durability (dependent on conditions)	20 years

Please note: The above technical information is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. October 2014

Premier Sealant Systems Ltd

Mercia Way Foxhills Industrial Park Scunthorpe, DN15 8RE, England

Tel. 01724 864100 | Fax. 01724 860116 | Email. sales@premseal.co.uk | Website. www.premseal.co.uk