

Metallocene Polyolefin

Product Description

Premier profiled foam fillers are designed to seal roofing and cladding profiles against dust, water and water vapour ingress.


Features

Premseal fillers are supplied:

- Made to measure
- With extended base
- Ventilated
- In a range of materials, thicknesses & colours
- In spacer & strip form
- Angle-cut

Typical Applications

- Sealing eaves and ridge
- Sealing hips and valleys
- Sealing rooflights

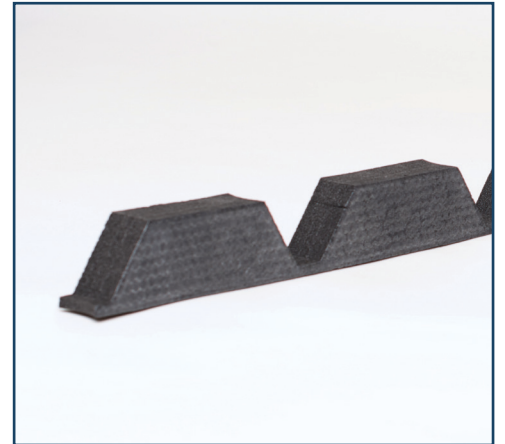

M25	
Type	High tensile
Material	Fully closed-cell metallocene catalysed polyolefins
Colour	Black or White
Thickness	25mm
Density (kg/m ³)	33
Service temperature (°C)	-70 to +100
Durability (dependent on conditions)	25 + years

Please note: The above technical information is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. October 2014

Premier Sealant Systems Ltd

Mercia Way Foxhills Industrial Park Scunthorpe, DN15 8RE, England

Tel. 01724 864100 | Fax. 01724 860116 | Email. sales@premseal.co.uk | Website. www.premseal.co.uk