


Metallised Tape

Product Description

Novia Metallised tape is an extremely high tack, high tear resistant, low emissivity and low moisture vapour permeability lap sealing tape for use in all air and vapour control layer and damp proof membrane applications.

The use of a high specification acrylic dispersion adhesive gives the product superb adhesion, whilst the use of a high performance metalised polyester, instead of the traditional low strength combination of aluminium foil and paper, massively improves the overall strength and toughness of the tape.

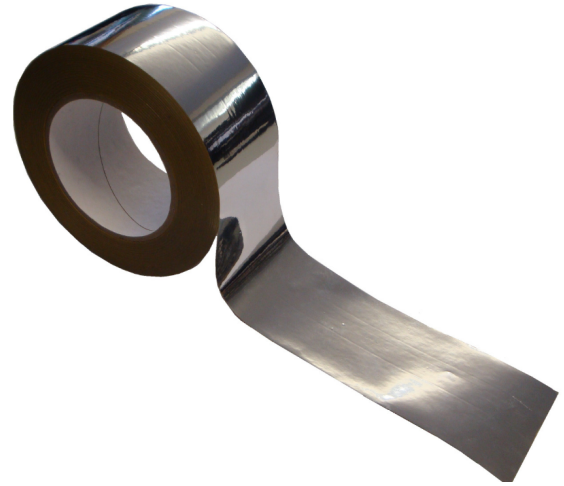

Product Data	
Material weight	0.5kg
Length	50 metres
Width	60mm
Thickness	0.05mm (50 microns)
Peel adhesion	≥ 15 N/25 mm
Shear adhesion	500g/625mm ²
Recommended installation temperature	+10 C to +30 C

Unless otherwise stated this data is to be regarded as TYPICAL data.

Please note: The above technical information is given as a guide and is based on recent test data obtained under laboratory conditions. Materials should be fully tested by the end user to establish suitability of the product for the intended application. Feb 2018

Premier Sealant Systems Ltd.

T 01724 864 100 | E sales@sealprem.com | www.sealprem.com

Mercia Way, Foxhills Industrial Park, Scunthorpe, DN15 8RE

Registered Office: 19 Titan Court, Luton, LU4 8LL | Registered in Cardiff No. 3000843